


Underwater Dual Dome Network Camera GLF-UDC-DDN200-POM

Product Features

- Pan 360° free rotation / Tilt 180°
- Dual dome IP camera
- Ruggy and affordable.
- Programmable functions: Focus, iris, day/night, white balance, etc.
- Data and power transfer by two wire
- warranty 1 year, life-long maintenance.

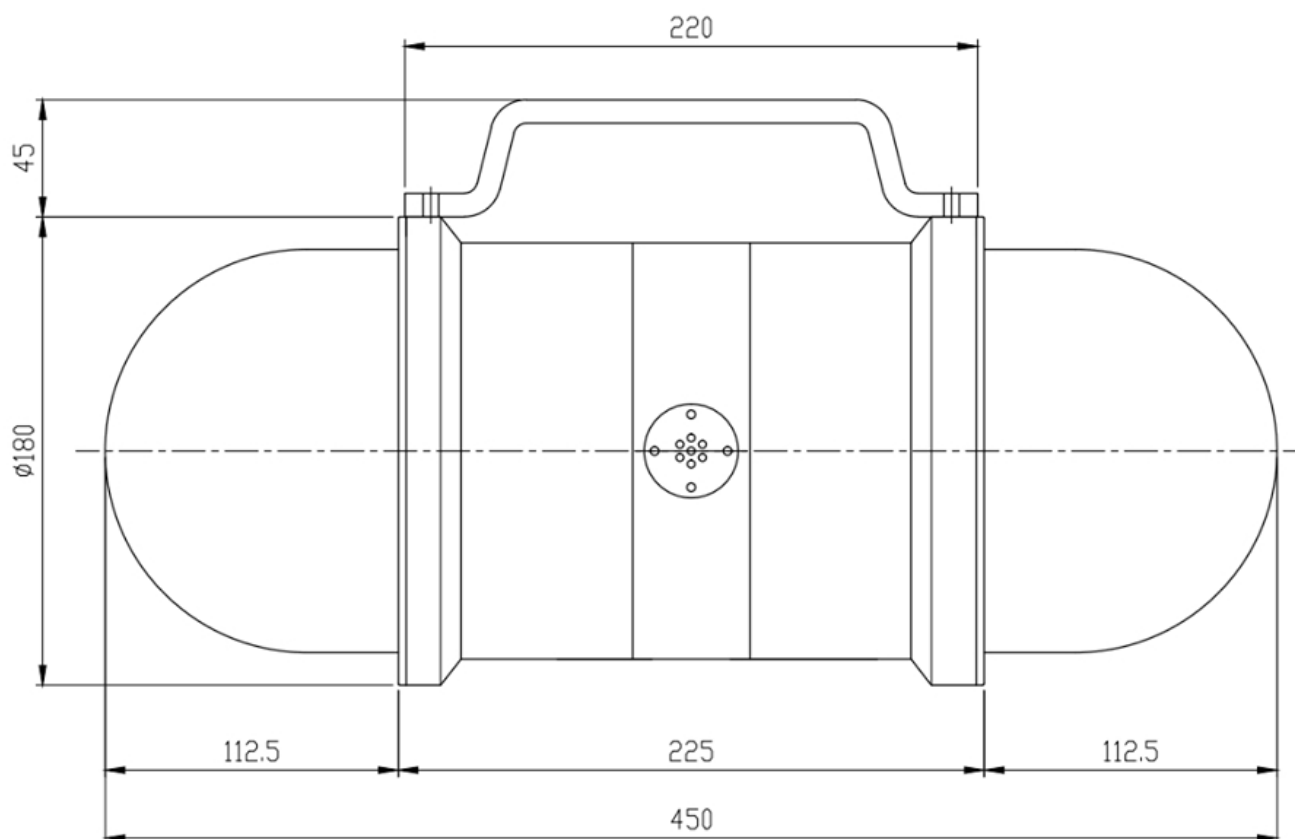

Main Specifications

Model No.	GLF-UDC-DDN200-POM
Image Sensor	1/2.8"progress Scan CMOS
Resolution	1920 x 1080
Signal to noise ratio	>50dB (AGC off)
Electronic shutter	1-1/10,000s

Horizontal view angle	58.3-3.2 degrees (wide-angle telescope)
Movement range	Pan 360° (endless) Tilt 180°
Optical zoom	20X
Sensitivity	Color: 0.05Lux @ (F1.6, AGC ON) BW: 0.01Lux @ (F1.6, AGC ON)
Resolution and frame rate	50Hz:25fps(1920×1080)、25fps(1280×720) 60Hz:30fps(1920×1080)、30fps(1280×720)
Video compression	H.265/H.264/MJPEG
LED Light Source	N/A
Camera Size	Φ 180*450 mm
Connector	MCBH-2M
Working Temperature	-10℃ ~ 50℃
Working Depth	100 meter
Interface type	RJ45
Power supply	48V
Window	Optical acrylic
Housing	POM
Weight in Air	5.0 KG


PLC network receiver




Item	PLC network receiver
Power input	AC85V-245V 50/60HZ
Power output	DC48V
Max current	1.2A
Max capacity	220W
Speed	200Mbps
Max distance	600M
Network port	1*RJ45
Standard	IEEE802.11a IEEE802.3u IEEE802.3ab
Compatibility	200Mbps 300Mbps
Cable required	>2*0.5 ²
Shell material	ABS
Operating temperature	-20℃-40℃
Operating humidity	10%-90%RH
Operating frequency	1.8-30MHZ
Dismission	125*60*40mm

Conneting

WIRING DIAGRAM **Granfoo**

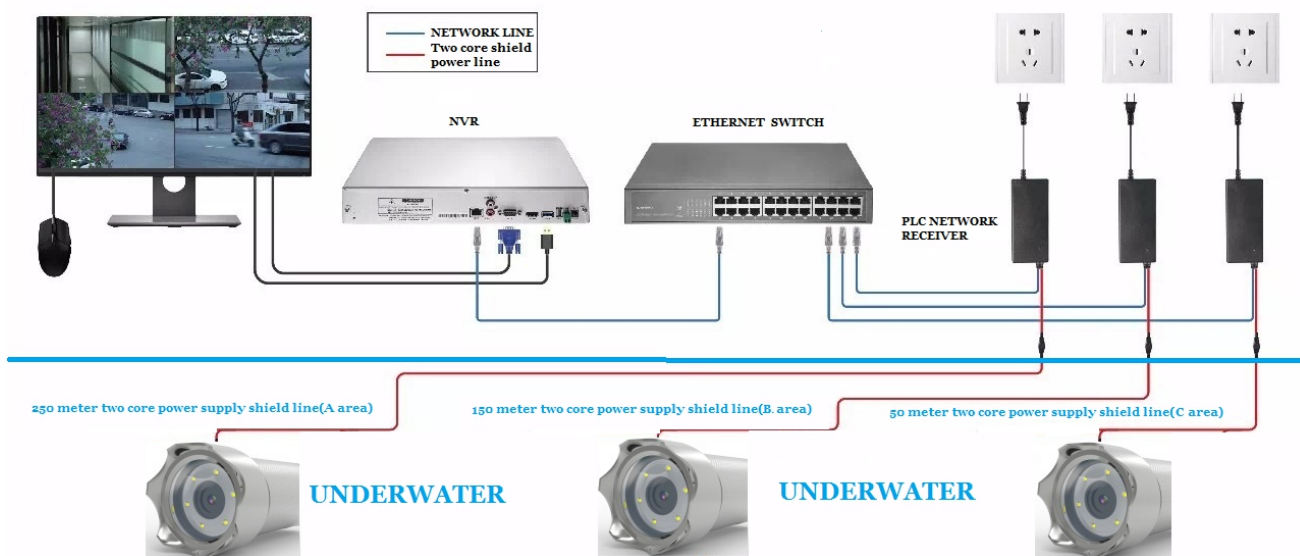

Product Show

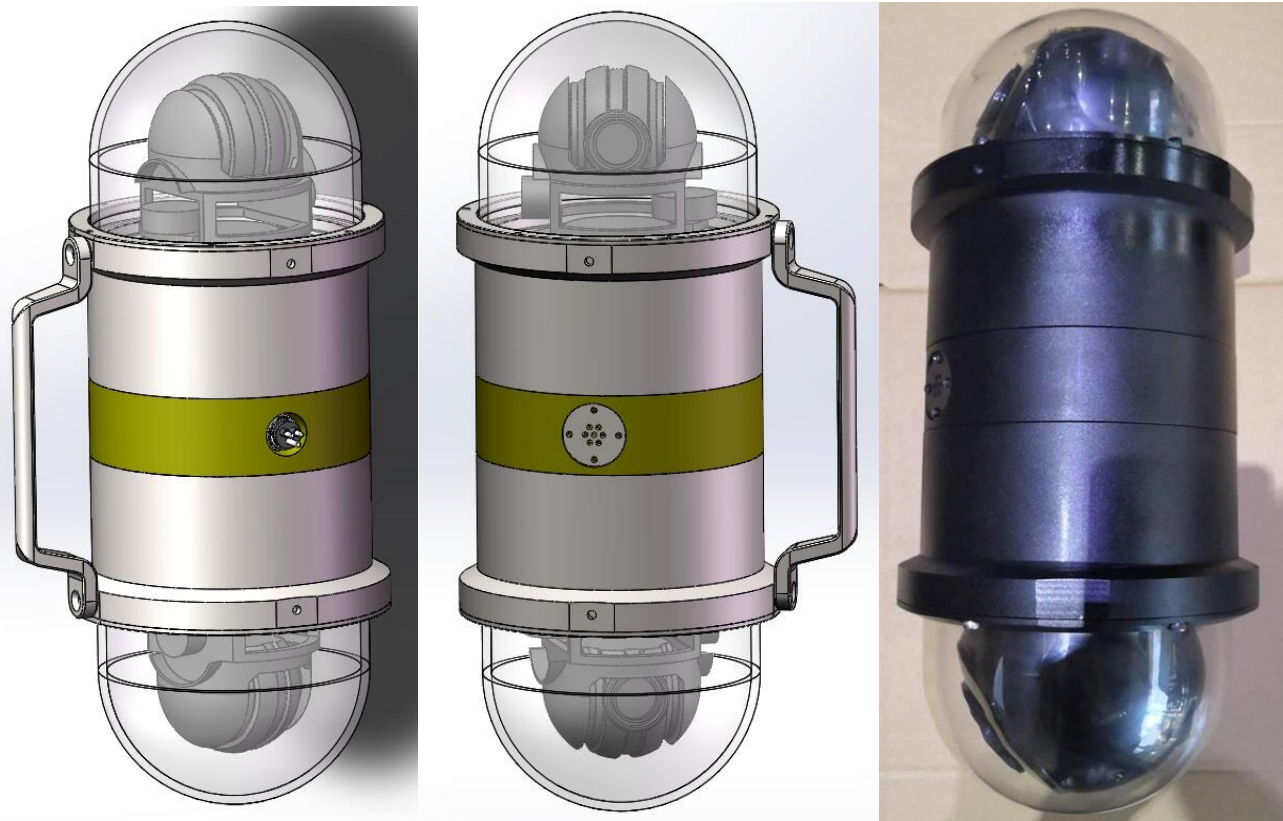

Packing List

1. 1 pcs Camera
2. 10m cable
3. 1 pcs PLC Receiver